

Forum FC108

full-range coaxial point-source loudspeaker

Product Overview

Forum FC108 is an 8-inch full-range coaxial point-source loudspeaker that delivers exceptional fidelity and output in a compact, install-friendly form factor. With a frequency range of 53 Hz–20 kHz and 122 dB max peak SPL, Forum FC108 provides clear, impactful sound for small-to-mid installations. The design features a high-excursion coaxial driver and Beamwidth Matching Waveguide technology for consistent 110° × 60° coverage, ensuring even audio distribution across the space. The fully tuned passive crossover means no additional processing is required—just plug in and get excellent performance with any full-range signal. Designed for easy installation, Forum FC108 offers surprisingly high output from a compact enclosure, making it well-suited for a variety of installations—right out of the box.



Key Features

Fully tuned passive crossovers for excellent performance right out of the box

High-excursion coaxial drivers deliver up to 122 dB max peak SPL

Beamwidth Matching Waveguide technology for consistent 110° × 60° coverage

Compact, rotatable cabinets with square grilles for flexible installation

Robust cabinet construction for long-lasting durability

Factory-optimized loudspeaker presets when combined with Bose Professional amplifiers and processors

IP43-rated for indoor and protected outdoor environments

Mounting options include U-bracket, surface-mount pan-and-tilt bracket, suspension rail, and optional eyebolt suspension

Applications

Retail / restaurants

Houses of worship

Performing arts

Education

Corporate

Hospitality

Forum FC108

full-range coaxial point-source loudspeaker

Technical Specifications

SINGLE-LOUDSPEAKER PERFORMANCE		
Frequency Response (-3 dB) ¹	75 Hz – 17,000 Hz	
Frequency Range (-10 dB) ¹	53 Hz – 20,000 Hz	
Nominal Coverage Pattern	110° horizontal × 60° vertical	
AUDIO PERFORMANCE ²	Passive	Bi-amp
Power Handling, Long-term Continuous ³	150 W	150 W (LF) + 20 W (HF)
Power Handling, Peak ⁴	1200 W	1200 W (LF) + 320 W (HF)
Sensitivity (SPL / 1 W @ 1 m)	94 dB	94 dB
Calculated Maximum SPL @ 1 m, Continuous ⁵	115 dB	116 dB
Calculated Maximum SPL @ 1 m, Peak	121 dB	122 dB
Crossover	Internal passive or external bi-amp. Use Bose Professional presets for optimal performance when bi-amplified.	
Loudspeaker EQ	Bose Professional presets available	
TRANSDUCERS		
Low Frequency	1 × 8.0 in (203 mm) woofer	
High Frequency	1 × 1.7 in (43 mm) compression driver	
Nominal Impedance	8 Ω, passive / 8 Ω (LF) + 8 Ω (HF), bi-amp	
PHYSICAL		
Enclosure Material	Birch plywood	
Finish	2-part spray polyurethane coating, black	
Grille	Perforated steel, powder-coated finish, black	
Logo	Rotatable	
Environmental ⁶	IP43, protected-outdoor usage	
Connectors	(1) Neutrik® speakON® NL4, (1) barrier strip	
Suspension / Mounting	(6) M10 threaded inserts (2 on top, 2 on bottom, 1 per side) (4) M8 threaded inserts (rear panel, for surface-mount pan-and-tilt bracket) (4) M6 threaded inserts (1 on top, 1 on bottom, 1 per side) (3) M8 threaded inserts (bottom, for external pole adapter)	
Product Dimensions (height × width × depth)	318 mm × 318 mm × 279 mm (12.5 in × 12.5 in × 11.0 in)	
Net Weight, Single Loudspeaker	12.7 kg (28.1 lb)	
Shipping Weight	14.7 kg (32.3 lb)	
Package Contents	(1) Forum FC108, (1) installation guide	
Optional Accessories	Forum FC108 U-bracket, AMM suspension bracket, surface-mount pan-and-tilt bracket, AMUPOLEAT external pole adapter	

Forum FC108

full-range coaxial point-source loudspeaker

PRODUCT CODES	
Forum FC108 loudspeaker	A00205-0100 FC108 MULTIPURPOSE LDSPKR
Forum FC108 U-bracket	A00508-0100 FC108,U-BRACKET,BLACK
AMM suspension bracket	843344-0010 AMM SUSPENSION BRACKET
AMUPOLEAT external pole adapter	893630-0100 KIT,AMU POLE CUP,BLK
Surface-mount pan and tilt bracket, black	889687-0100 PAN & TILT BRACKET,BLK
Surface-mount pan and tilt bracket, white	889687-0200 PAN & TILT BRACKET,WHT

Footnotes

1. Frequency response and range measured in passive mode using Klippel Near Field Scanner (NFS) system.


2. AES transducer test and Bose Professional extended-lifecycle test, passive and bi-amplified.

3. Bose Professional extended-lifecycle test using pink noise filtered to meet IEC 268-5, 6-dB crest factor, 500-hour duration.


4. Bose Professional peak power test using 6-dB crest factor pink noise, 96-hour duration with recommended loudspeaker processing.

5. Maximum SPL calculated using sensitivity and power ratings, exclusive of power compression.

Frequency Response ¹

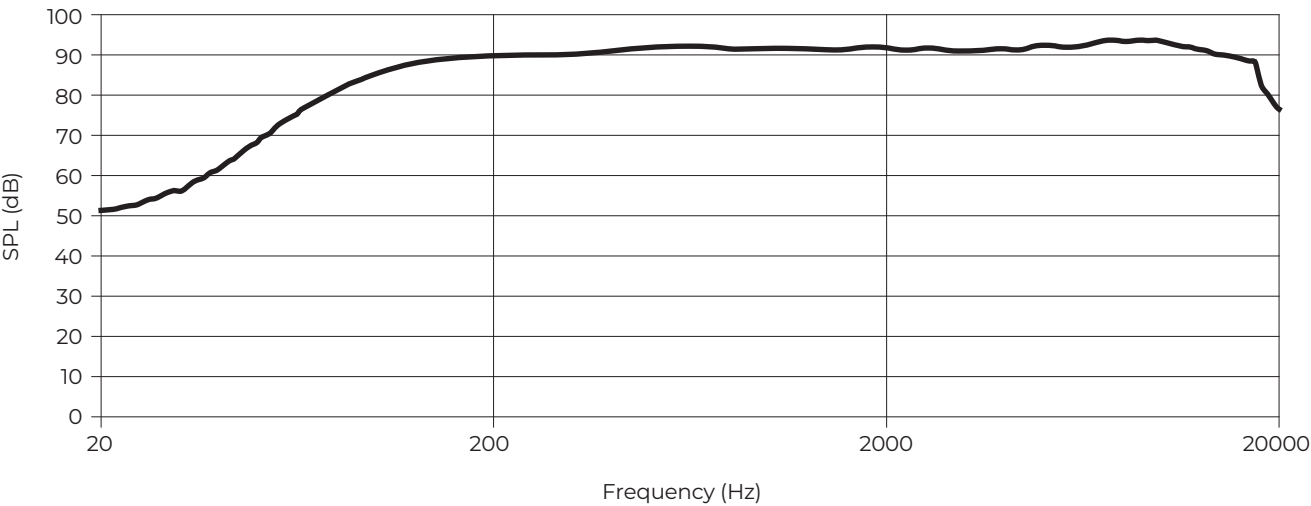


Beamwidth

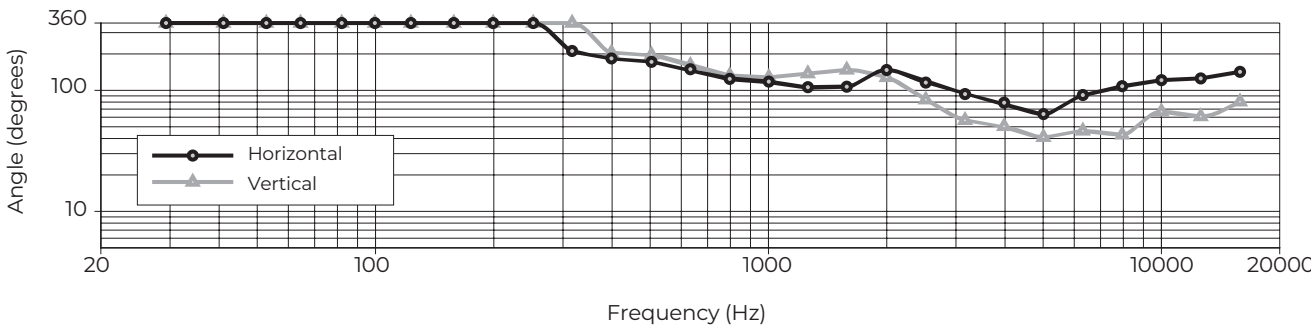


Forum FC108

full-range coaxial point-source loudspeaker


Dimensions ⁶




Right View ⁷

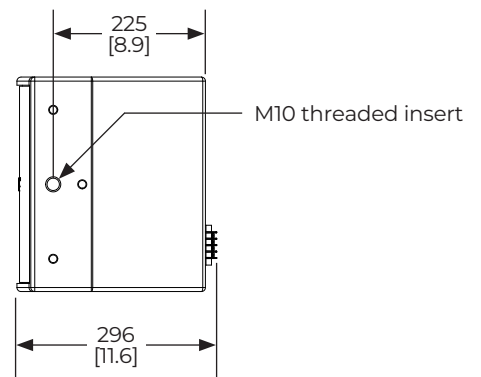


Front View
(without grille)




Rear View

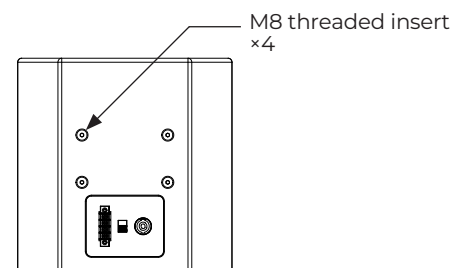

Top View

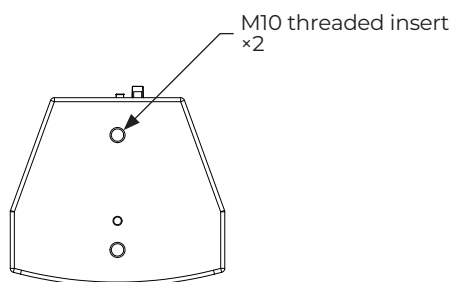

Bottom View

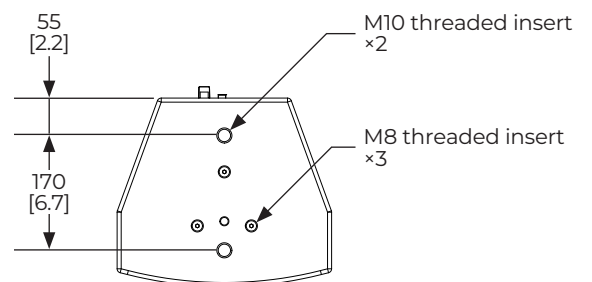

6. Dimensions are shown in millimeters over inches.

7. Dimensions also apply to opposite side.

© 2025 Transom Post OpCo LLC. All rights reserved. Bose is a trademark of Bose Corporation. Neutrik and speakON are registered trademarks of Neutrik AG. All other trademarks are the property of their respective owners.

For additional specifications and application information, visit BoseProfessional.com. Specifications are subject to change. 06/2025